



INSTALLATION INSTRUCTIONS

FOLDING WINDSCREEN FOR “ANGULAR” HOOD FULL SIZE UNITS (16575)

As illustrated below, this kit consists of:

Folding windscreen	Qty: 1
Mounting clip	Qty: 2
Clip retainer	Qty: 2
Weather seal	Qty: 1
Dash seal	Qty: 1




CARE AND CLEANING INSTRUCTIONS FOR YOUR WINDSCREEN

This windscreen is made of high impact acrylic and requires care when cleaning to avoid scratches. **DO NOT** use standard glass cleaner. Windscreen should be cleaned using a plastic or acrylic cleaner that can be purchased at most major retailers. Follow the manufacturer recommendations for using the cleaning product.

Procedure:

- 1 After unpacking the windscreen, install windscreen clips to lower windscreen by carefully pushing the clips onto the lower windscreen cutouts as shown in Fig 1. **Use caution to:**
 - a. Install the clip in the correct orientation. Lower windscreen flange and upper windscreen flanges should face up as shown in figure 1.
 - b. Install using firm pressure, but **DO NOT** hammer the clip onto the windscreen or damage may occur.

CAUTION DO NOT hammer the clip onto the windscreen or damage may occur

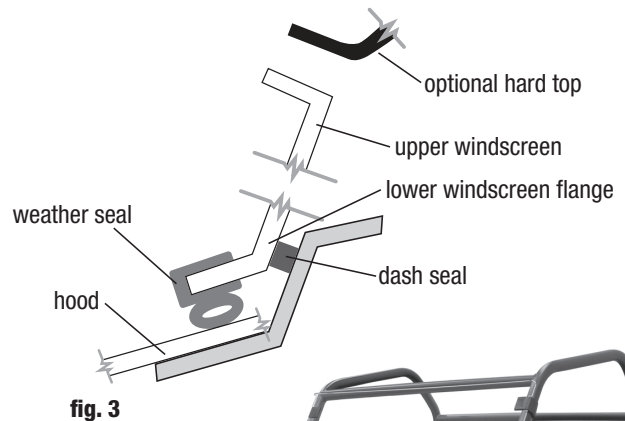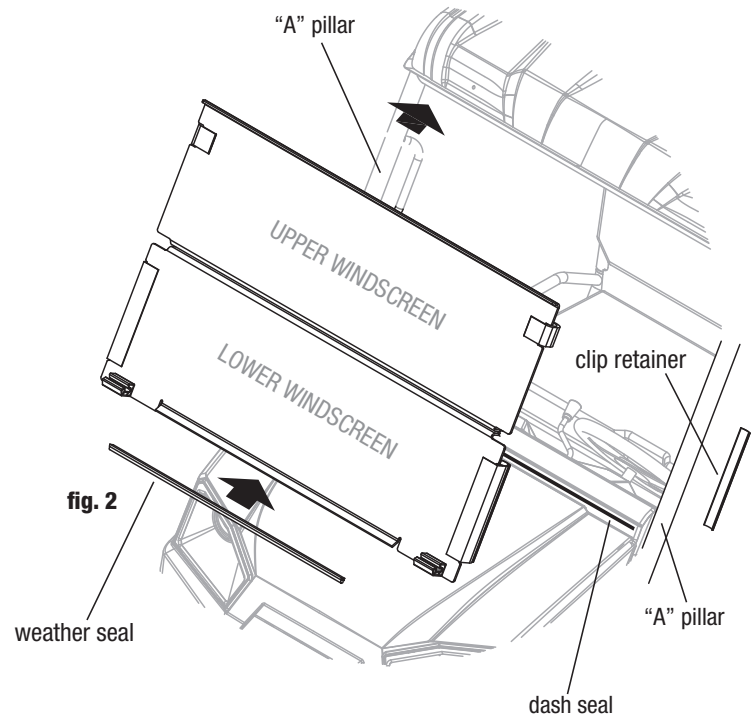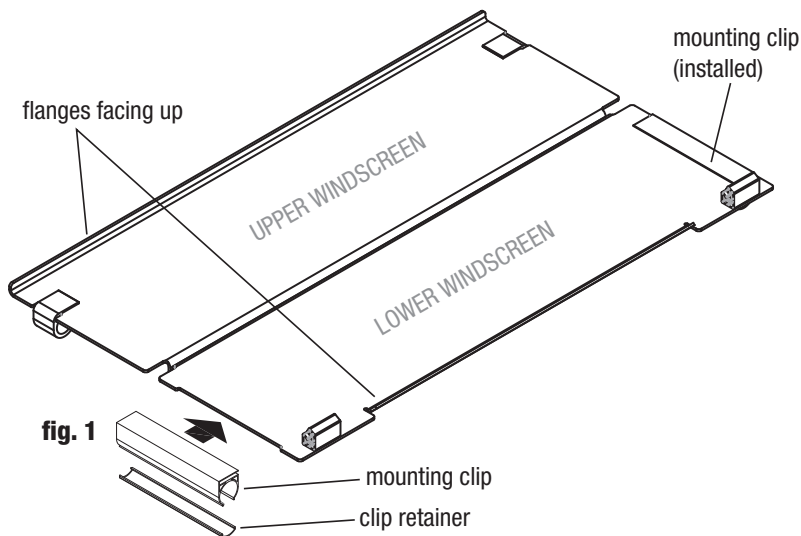

- 2 Install dash seal along front edge of dash as shown in figures 2 & 3.
- 3 Install the weather seal to the lower flange on the windscreen. The bulb portion of the seal should be on the BOTTOM side of the flange such that it seals against the hood as shown in figure 3.
- 4 With the clips and weather seal installed on the lower windscreen, install on the vehicle by snapping the clips over the “A” pillar of the vehicle as shown in figures 2 & 3.
- 5 Proper installation should result in the weather seal filling the space between the hood and lower flange. Refer to figure 3 for proper seal orientations.
- 6 With the windscreen in place, install the clip retainers onto the windscreen clip by sliding them upward from the bottom of the clip.



Finished installation